





Front view

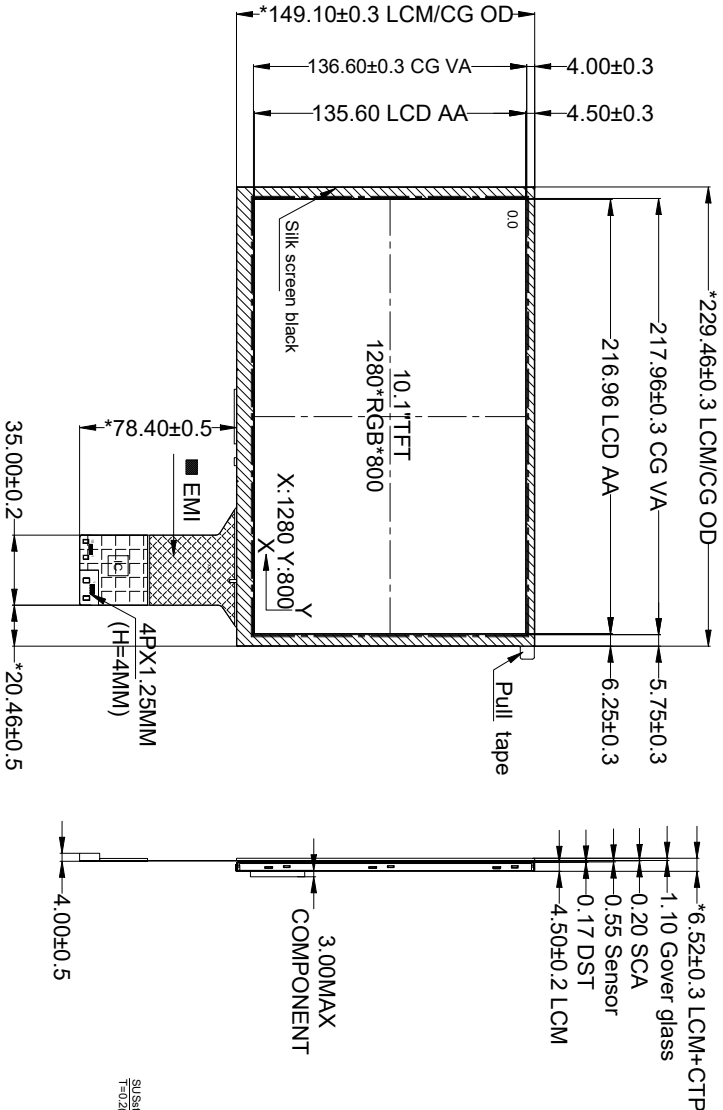

Side view

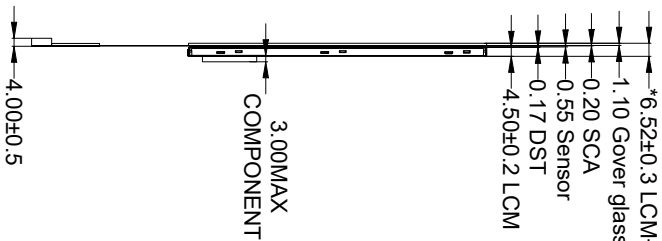

Rear view

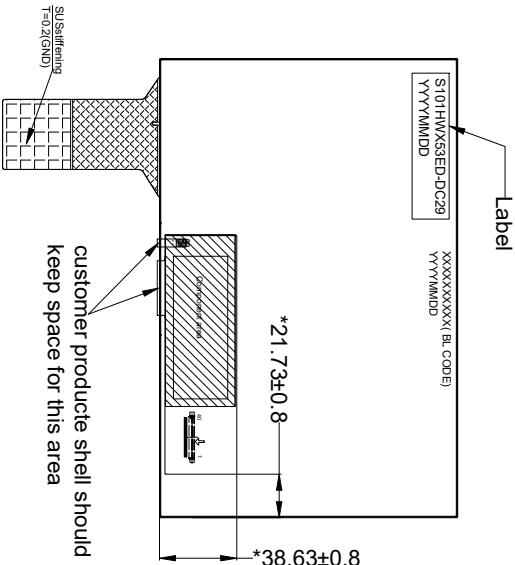

CTP PIN	
PIN	SYMBOL
1	USB-VDD5V
2	USB-D-
3	USB-D+
4	USB-GND
35	NC
36	NC
37	NC
38	NC
39	LED+
40	LED+

CTP NOTES:									
1.G+G:Cover Glass: 1.1MM, SCA:0.2MM, SENSOR:0.55MM, Total: 1.85±0.15MM; 2.Working condition: DGSV, Interface: USB 3.IC:ILI2511(COF), Support touch: 10points; Resolution: Automatic Recognition 4.Surface hardness:3H; 5.Operation temperature:-30℃~+80℃,≤90%RH;; 6.Storage temperature:-30℃~+85℃,≤90%RH;; 7.Luminousness:85%; 8.All RoHS certified;									
LCM NOTES:									
1.DISPLAY TYPE: 10.1 INCH TFT /Normally Black 2.BACKLIGHT: 4.5 CHIP WHITE LED, S59P, VF =13.5-17V, IF=360mA 3.OPERATING TEMP:-30℃~+85℃ 4.STORAGE TEMP:-30℃~+85℃ 5.LCD IC:EK79202B1 6.Luminance: 800cd/m2(TYP) 7.LED Life Time :50000 Hours 8."("reference dimension;"*"critical dimension 9.RoHS Compliant									
REV.	DATE	MODIFICATION	DIRECTION						
1.0	2022.07.29	First issue	Gray						
				INTERFACE					
				LVDS Interface					
				FPC Connector TF31-40S-0.5HS(S5)					
				Material code:  深圳市思迪科科技有限公司 SHENZHEN CDTCECH ELECTRONICS					
				PART NO.		S010HMX35ED-DC29			
				REV.		SHEET OF			
				V1.0		1/1			
				TOLERANCE		JUNLESS			
				SPECHED		±0.2			
				UNIT		mm			
				SCALE		1:1			
				PROJECTION					
				3rd ANGLE					

INTERFACE		LVDS Interface	
FPC Connector		TF31-40S-0.5HS(65)	
VIEWING DIRECTION		FREE	
DWN		REV. V1.0	
L/H Huang 2022.07.29		SHEET OF 1/1	
CHND L/HF 2022.07.29		TOLERANCE UNLESS SPECIFIED	
PROJECTION 3rd ANGLE		UNIT mm	
		SCALE 1:1	

深圳市思迪科电子有限公司
SHENZHEN CDTTECH ELECTRONICS

PART NO. S101HMX33ED-DC29

Material code:

DWN

REV. V1.0

SHEET OF 1/1

TOLERANCE UNLESS SPECIFIED

UNIT mm

SCALE 1:1