
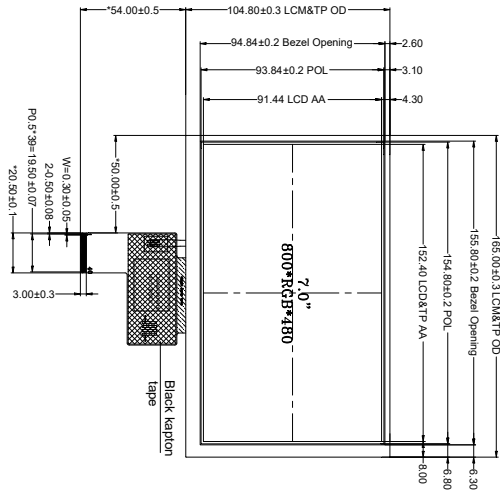
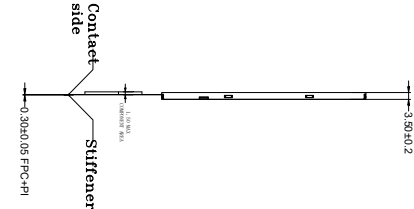



Front view

Side view

Dorsal view

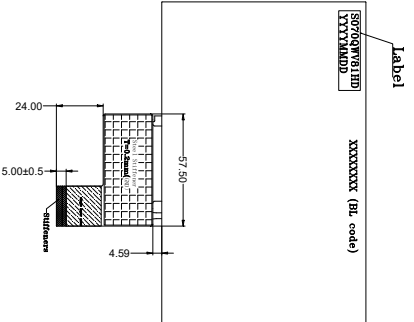

PTN	SYMBLE
1	VBL-
2	VBL+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DC/LK
31	DISP
32	HSYNG
33	VSYNG
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU



- LCM NOTES:
- 1.DISPLAY TYPE: 7.0 INCH TFT (Normally Black
 - 2.VIEWING DIRECTION:UDIR 80/80/80/80
 - 2.BACKLIGHT: 30 CH+ WHITE LED, 3510P
 - 3.OPERATING TEMP: -30°C~+85°C
 - 4.STORAGE TEMP: -30°C~+85°C
 - 5.LCD IC:-
 - 6.Lumiance:500cd/m2(TYP)
 7. (*)reference dimension,**critical dimension
 - 8.Rohs Compliant

REV.	DATE	MODIFICATION
1.0	2021.01.11	Final Issue

INTERFACE	RGB Interface
	FPC Connector (FH12-40S-0.5SH)
DIRECTION	ALL
	Gay

SHENZHEN CDTech ELECTRONICS	
SHENZHEN CDTech ELECTRONICS	
Material code	TBD
DWN	J.J Huang 2021.01.11
REV.	1.0
SHEET OF	1/1
TOLERANCE UNLESS	#0.2
SPRINTED	
UNIT	mm
SCALE	1:1