PRODUCT SPECIFICATION

CDTECH Model: **S050QWV45HS**

CUSTOMER Model: -

Description: **5.0” TFT-LCD Module**

Version: **1.0**

CDTECH	PREPARED BY	CHECKED BY	APPROVED BY
SIGNATURE			
DATE	2022.8.30	2022.8.30	2022.8.30

CUSTOMER APPROVAL	SIGNATURE	DATE

Record of Revisions

Version	Revise Date	Description	Page
1.0	2022-08-30	First Release	-

Contents

1. General Specifications 4

2. Absolute Maximum Ratings 4

3. Elecrical Characteristics 5

4. Interface Pin Assignment 6

5. Interface Characteristics 7

6. Optical Specifications 11

7. Reliability Test Items 14

8. Mechanical Drawing 15

9. Packing 16

10. TFT-LCD Module Inspection Criteria 17

11. Precautions for Use of LCD modules 21

1. General Specifications

1.1 LCM General Information

Item	Specification	Unit
LCD Size	5.0	inch
Number of Pixels	800(H) RGB x480(V)	pixels
Display Mode	Normally White	-
Viewing Direction	12 O'clock	o' clock
Interface	RGB	-
Display Colors	16.7M	colors
Outline Dimension	120.70(H) x 75.80(V) x 2.80(D)	mm
Active Area	108.00(H) x 64.80(V)	mm
Pixel Pitch	0.1350(H) x 0.1350(V)	mm
Driver IC	ILI6122+ILI5960	-
Operation Temperature	-20~70	℃
Storage Temperature	-30~80	℃

Note1:Requirements on environmental protection RoHS compliant.

2. Absolute Maximum Ratings

Item	Symbol	MIN.	MAX.	Unit	Note
Analog Supply voltage	VDD	-0.3	5.0	V	Note 1

Note 1:Permanent damage may occur to the LCD module if beyond this specification.
Functional operation should be restricted to the conditions described under normal operating conditions.

3. Elecrical Characteristics

3.1 Recommended Operating Condition for TFT LCD


Item	Symbol	Min.	Typ.	Max.	Unit	Note
Analog Supply voltage	VDD	3.0	3.3	3.6	V	
Analog supply current	I_{VDD}	-	TBD	-	mA	VDD=3.3V
RLogic input voltage	VIH	0.7*VDD	-	VDD	V	
	VIL	GND	-	0.3*VDD	V	

3.2 Recommended Driving Condition for Backlight

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Driving Current	I_F	-	40	-	mA	
Driving Voltage	V_F	16.2	-	20.4	V	
Power consumption	W_{BL}	0.648	-	0.816	W	
LED Life-Time	N/A	30,000	-	-	Hours	Ta=25℃ Note 1

Note 1:LED lifetime is defined as the module brightness decay 50% of original brightness at Ta=25 degree, typical current.

Note 2:LED circuit :

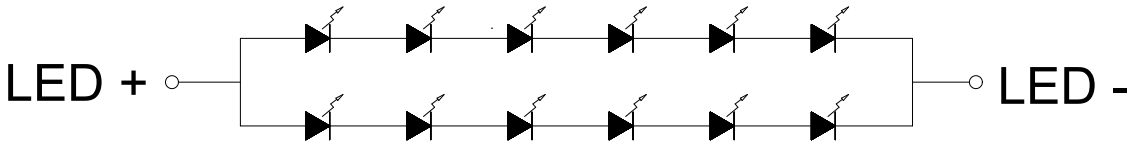

4. Interface Pin Assignment

4.1 LCM Pin Assignment

Recommended connector：FH12-40S-0.5SH manufactured by HIROSE


No.	Symbol	Description
1	VLED-	Backlight LED Cathode
2	VLED+	Backlight LED Anode
3	GND	Ground
4	VDD	Power supply
5-12	R0-R7	Data bus
13-20	G0-G7	Data bus
21-28	B0-B7	Data bus
29	GND	Ground
30	DCLK	Dot clock signal input. Latching input data at its rising edge
31	DISP	Display on/off control
32	HSYNC	Horizontal sync signal
33	VSYNC	Vrtical sync signal
34	DE	Data enable input. Active high to enable the input data bus under “DE Mode”
35	NC	No connection
36	GND	System Ground
37	NC/XR	No connection
38	NC/YD	No connection
39	NC/XL	No connection
40	NC/YU	No connection

5. Interface Characteristics


5.1 Power Sequence

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence should be as the diagram below.

a. Power on sequence:

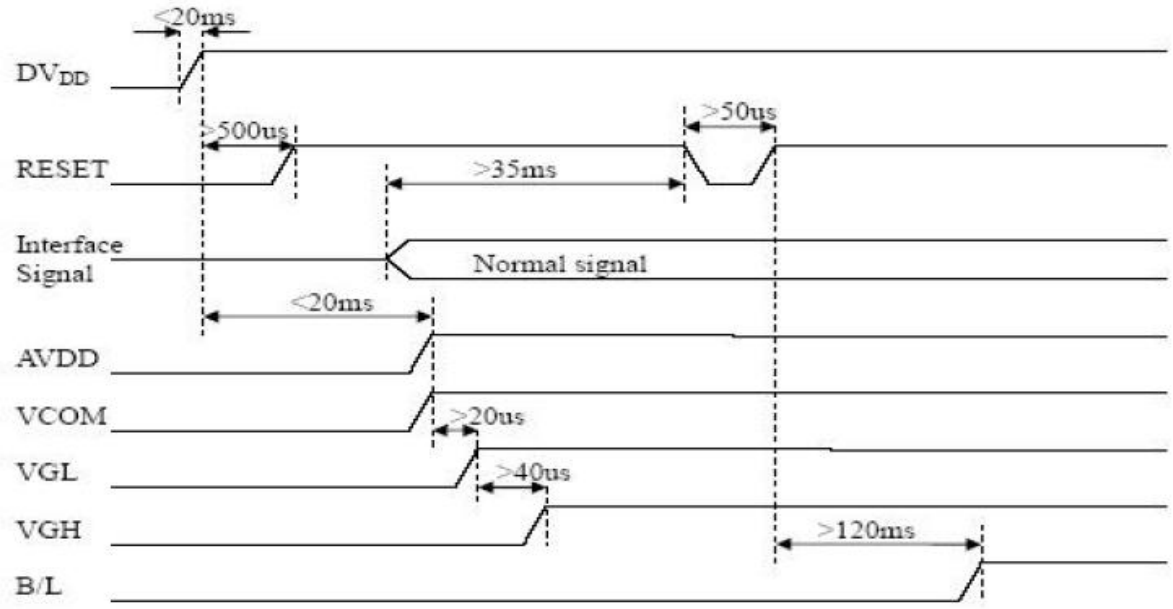


b. Power off sequence:

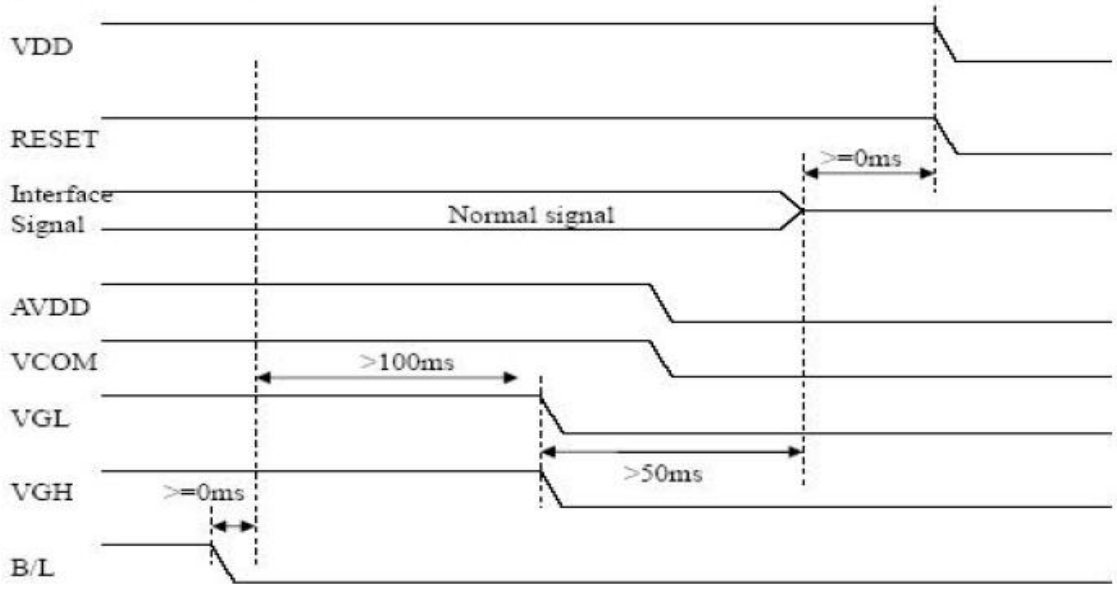

5.2 Timing Conditions

Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
HS setup time	Thst	8	-	-	ns	
HS hold time	Thhd	8	-	-	ns	
VS setup time	Tvst	8	-	-	ns	
VS hold time	Tvhd	8	-	-	ns	
Data setup time	Tdsu	8	-	-	ns	
Data hole time	Tdhd	8	-	-	ns	
DE setup time	Tesu	8	-	-	ns	
DE hole time	Tehd	8	-	-	ns	
DV_{DD} Power On Slew rate	TPOR	-	-	20	ms	From 0 to 90% DV_{DD}
RESET pulse width	TRst	1	-	-	ms	
DCLK cycle time	Tcoh	20	-	-	ns	
DCLK pulse duty	Tcwh	40	50	60	%	

5.3 Capacitive touch panel Specification

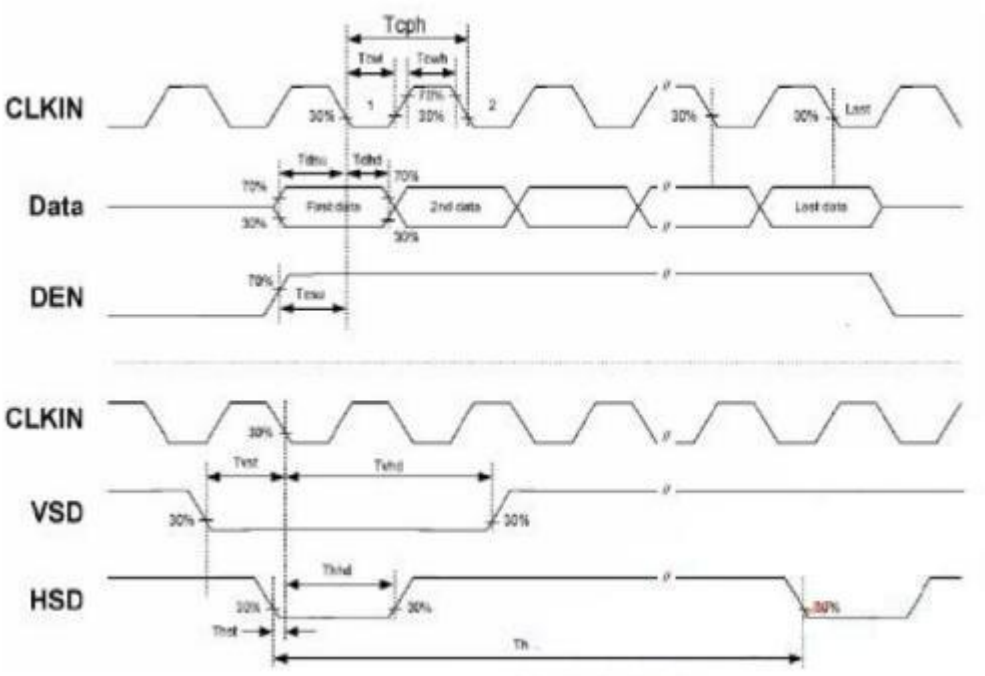

5.4 Timing

Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Horizontal Display Area	thd	-	800	-	DCLK	
DCLK Frequency	fclk	26.4	33.3	46.8	MHz	
One Horizontal Line	th	862	1056	1200	DCLK	
HS pulse width	thpw	1	-	40	DCLK	
HS Blanking	thb	46	46	46	DCLK	
HS Front Porch	thfp	16	210	354	DCLK	

Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Vertical Display Area	tvd	-	480	-	TH	
VS period time	tv	510	525	650	TH	
VS pulse width	tvpw	1	-	20	TH	
VS Blanking	tvb	23	23	23	TH	
VS Front Porch	tvfp	7	22	147	TH	

5.5 Data Input Format



Figure 3. 1 Horizontal input timing diagram.

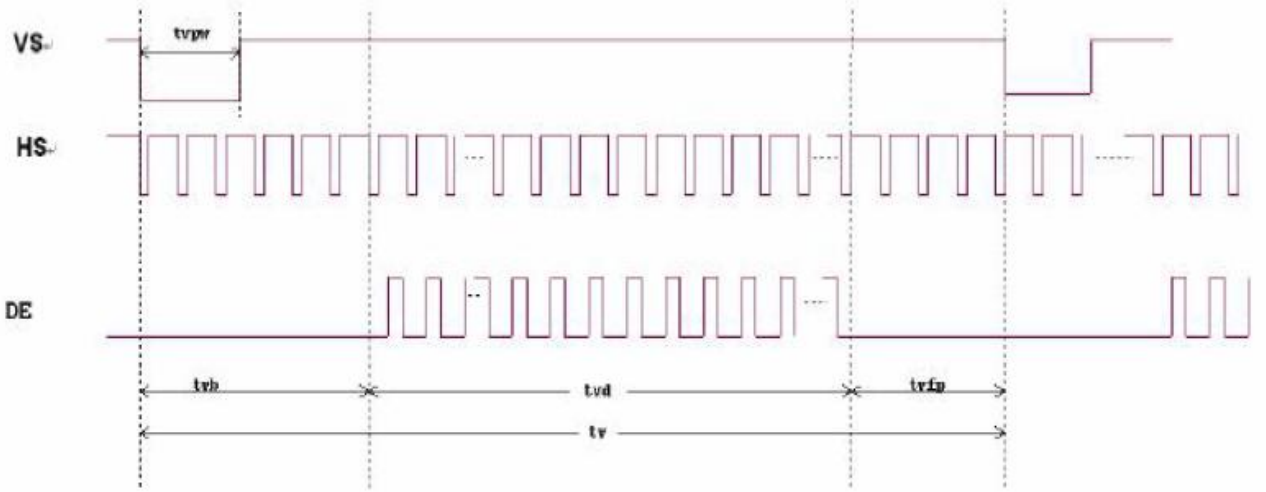



Figure 3. 2 Vertical input timing diagram.

6. Optical Specifications

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Viewing Angle (CR≥10) B/L ON	θ_T	Φ=90°(12 o'clock)	40	50	-	deg	Note2
	θ_B	Φ=270°(6 o'clock)	60	70	-	deg	Note2
	θ_L	Φ=180°(9 o'clock)	60	70	-	deg	Note2
	θ_R	Φ=0°(3 o'clock)	60	70	-	deg	Note2
Response Time	T_{ON}	Normal θ=Φ=0°	-	12	25	msec	Note4
	T_{OFF}		-	12	25	msec	Note4
Contrast Ratio	CR		400	500	-	-	Note1 Note3
Color Chromaticity	W_X		0.292	0.312	0.332	-	Note1 Note5
	W_Y		0.310	0.330	0.350	-	Note1 Note5
Luminance	L		450	500	-	cd/m²	Note1 Note7
Luminance Uniformity	Y_U		75	80	-	%	Note1 Note6
NTSC	-		-	49	-	%	-

Note 1:Definition of optical measurement system

The optical characteristics should be measured in dark room. After 5 minutes operation, the optical properties are measured at the center point of the LCD screen. All input terminals LCD panel must be ground when measuring the center area of the panel.

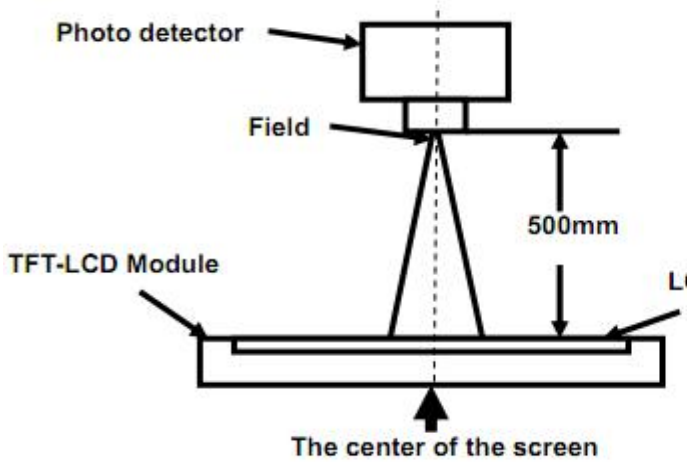

Item	Photo detector	Field
Contrast Ratio	SR-3A	1°
Luminance		
Chromaticity		
Lum Uniformity		
Response Time	BM-7A	2°

Note 2:Definition of viewing angle range and measurement system
Viewing angle is measured at the center point of the LCD by CONOSCOPE(ergo-80).

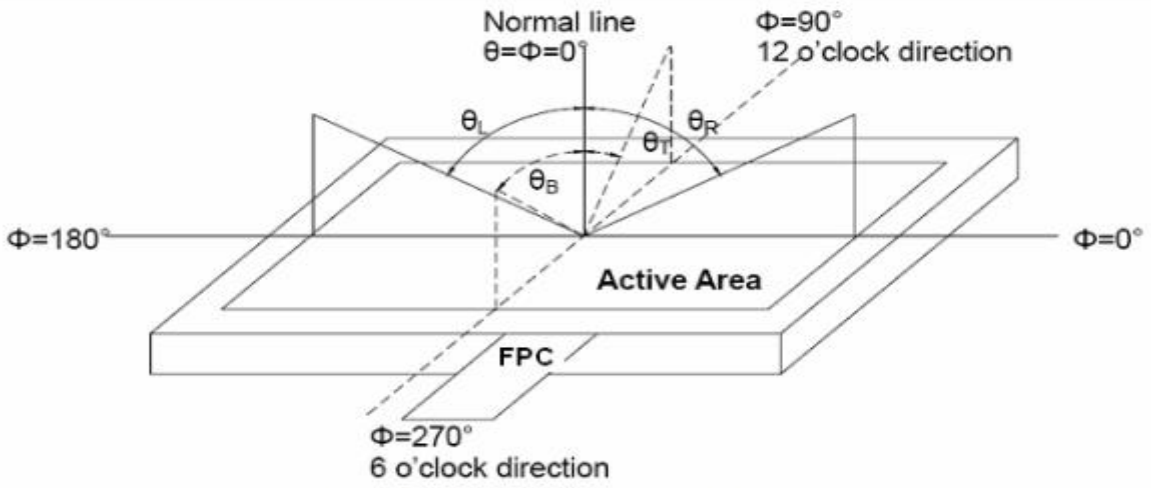



Fig. 1 Definition of viewing angle

Note 3: Definition of contrast ratio

$$CR = \frac{\text{Luminance with all pixels white}}{\text{Luminance with all pixels black}}$$

Note 4: Definition of Response time

The response time is defined as the LCD optical switching time interval between “White” state and “Black”state. Rise time (TON) is the time between photo detector output intensity changed from 90% to 10%. And fall time (TOFF) is the time between photo detector output intensity changed from 10% to 90%.

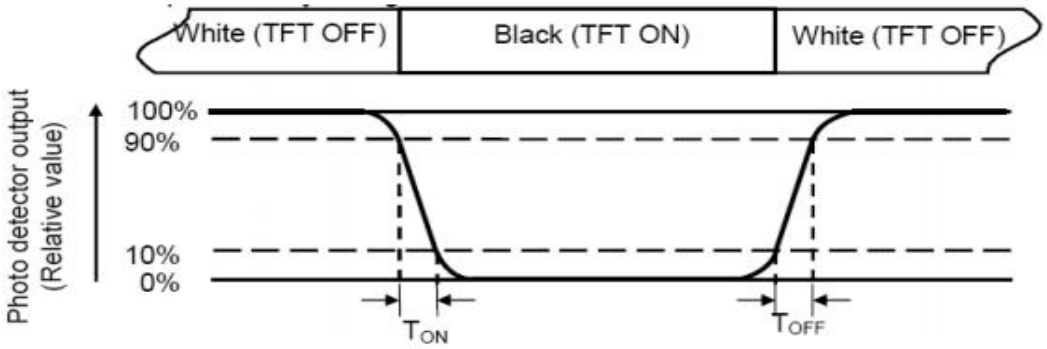

Note 5:Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

Note 6:Definition of Luminance Uniformity

The luminance uniformity in surface luminance is determined by measuring luminance at each test position 1 through n, and then dividing the maximum luminance of n points luminance by minimum luminance of n points luminance. For more information see FIG.2.

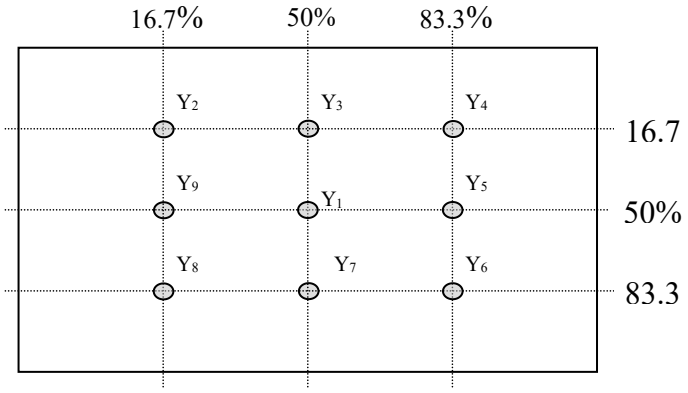


Fig. 2 Definition of points

Note 7:Definition of Luminance (Refer Fig. 2)

Surface luminance is the luminance with all pixels displaying white.

Lv = Average Surface Luminance with all white pixels(P1,P2,P3, ...,Pn).


7. Reliability Test Items

Test Item	Test Conditions	
High Temperature Storage	Ta= +80℃	96hrs
Low Temperature Storage	Ta= -30℃	96hrs
High Temperature Operation	Ta= +70℃	96hrs
Low Temperature Operation	Ta= -20℃	96hrs
High Temperature and Humidity Storage	Ta= +60℃, 90% RH	96hrs
Thermal Shock (Non-operation)	-30℃/30 min ~ +80℃/30 min for 20 cycles Start with cold temperature end with high temperature	
Electro Static Discharge	Contact = ± 4 kV, class B Air = ± 8 kV, class B R=330Ω,C=150pF	
Vibration	Sweep: 10Hz~55Hz~10Hz Stroke: 1.5mm 2 hrs for each direction of X .Y. Z.	
Mechanical Shock	60G 6ms,±X,±Y,±Z 3 times for each direction	
Package Drop Test	Height: 60 cm 1 corner, 3 edges, 6 surfaces	

Notes: The test result shall be evaluated after the sample has been left at room temperature and humidity for 2 hours without load. No condensation shall be accepted. The sample will not be accepted if appear these defects:

1). Air bubble in the LCD
2). Seal leak or Glass crack
3). Non display or abnormal display
4). Brightness reduction >50%


8. Mechanical Drawing

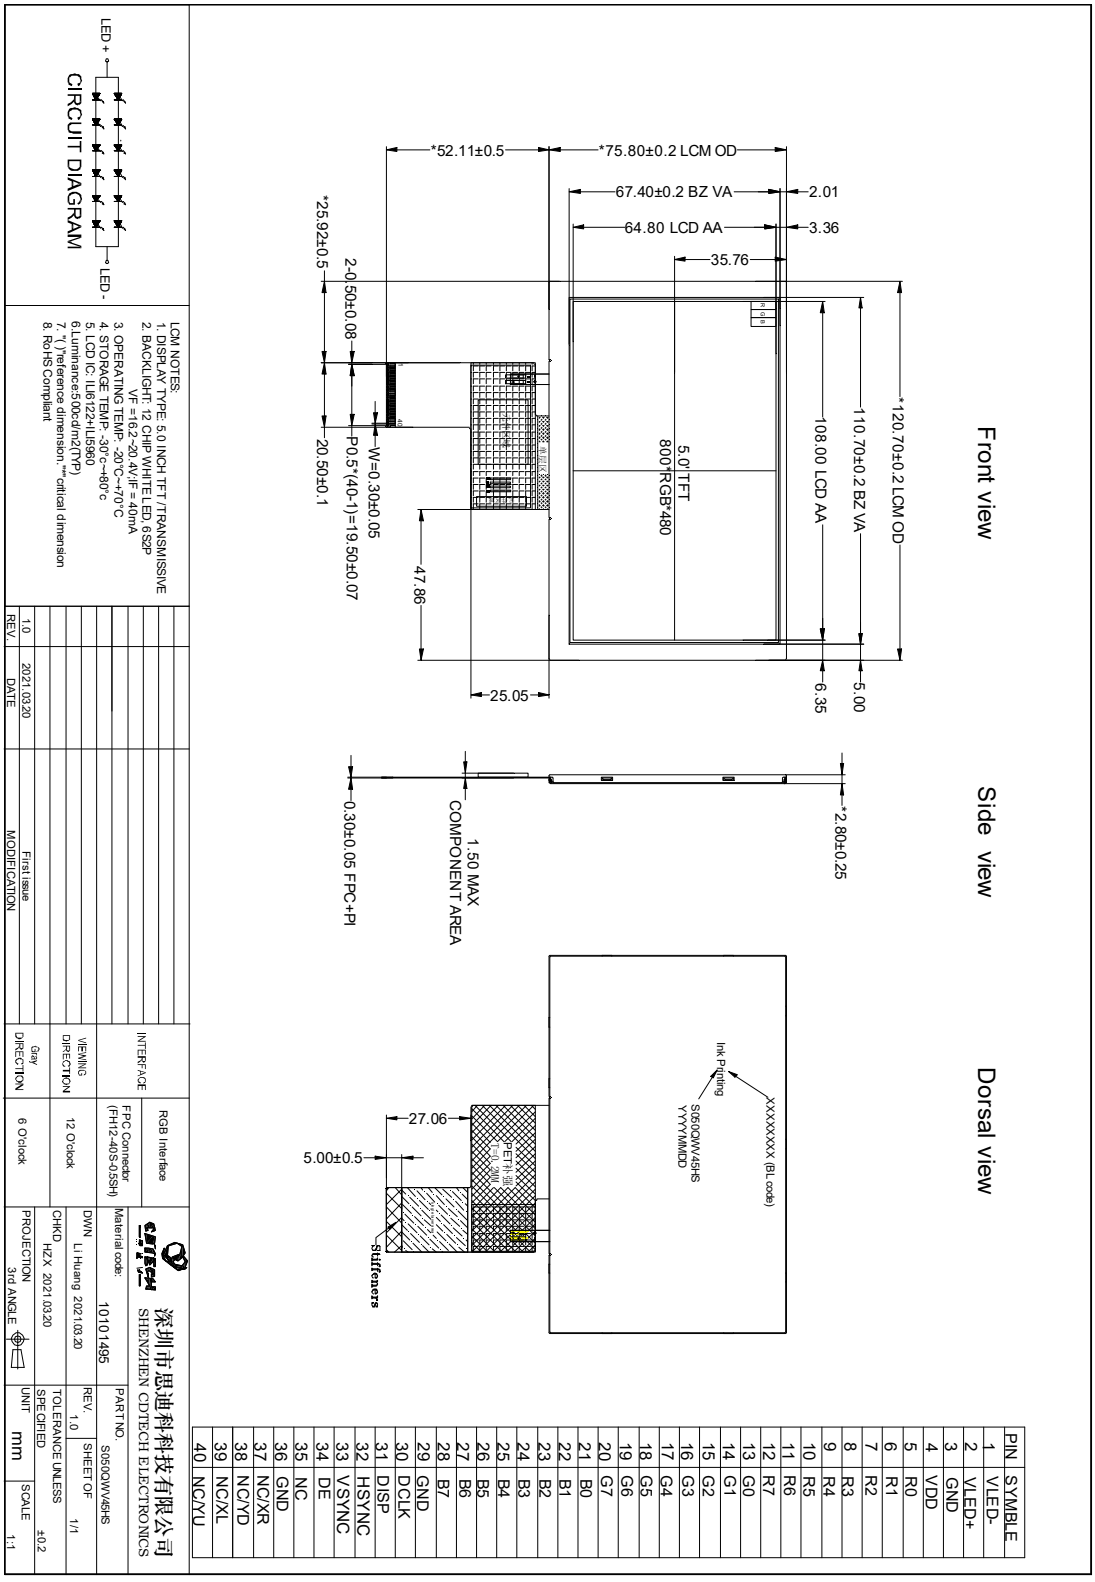

PIN	SYMBLE
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	NC/XR
38	NC/YD
39	NC/XL
40	NC/YU

9. Packing

Packing Method

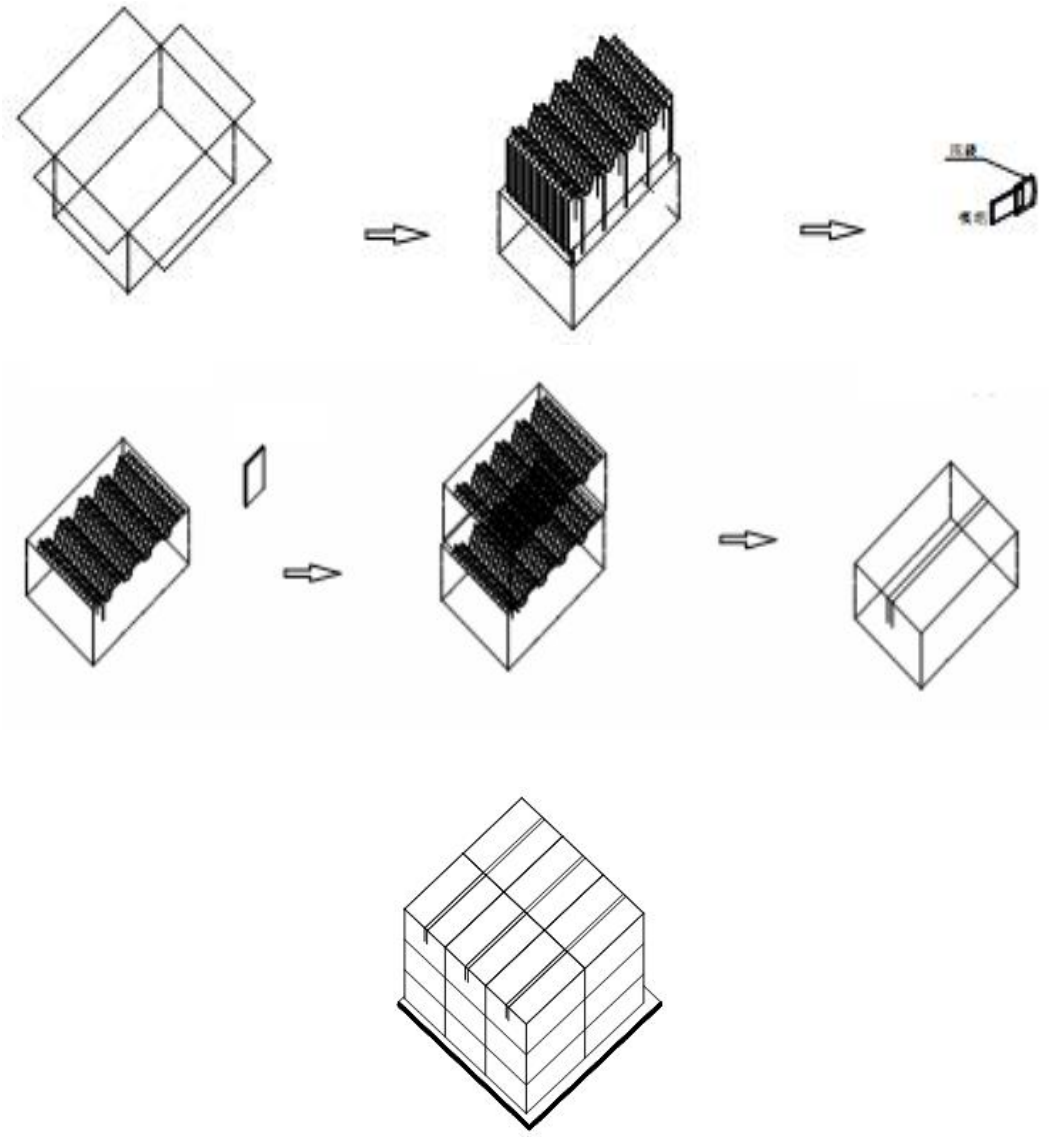

Steps:
1. Put module into tray cavity
2. Tray stacking
3. Put 1 cardboard under the tray stack and 1 cardboard above
4. Fix the cardboard to the tray stack with adhesive tape
5. Put the tray stack into carton
6. Carton sealing with adhesive tape

10. TFT-LCD Module Inspection Criteria

10.1 Scope

The incoming inspection standards shall be applied to TFT –LCD Modules (hereinafter called "Modules") that supplied by CDTech.

10.2 Incoming Inspection


The customer shall inspect the modules within twenty calendar days of the delivery date（the “inspection period”）at its own cost. The result of the inspection（acceptance or rejection）shall be recorded in writing, and a copy of this writing will be promptly sent to the seller, If the results of the inspecting from buyer does not send to the seller within twenty calendar days of the delivery date. The modules shall be regards as acceptance. Should the customer fail to notify the seller within the inspection period, the buyers right to reject the modules shall be lapsed and the modules shall be deemed to have been accepted by the buyer.

10.3 Inspection Sampling

10.3.1. Lot size: Quantity per shipment lot per model
10.3.2. Sampling type: Normal inspection, Single sampling
10.3.3. Inspection level: II
10.3.4. Sampling table: MIL-STD-105E
10.3.5. Acceptable quality level （AQL ）
Major defect: AQL=0.65
Minor defect: AQL=1.00

10.4 Inspection Conditions

10.4.1 Ambient conditions:
a. Temperature: Room temperature 25±5℃
b. Humidity: (60±10) ％RH
c. Illumination: Single fluorescent lamp non-directive (300 to 700 Lux)
10.4.2 Viewing distance
The distance between the LCD and the inspector’s eyes shall be at least 35±5 cm.
10.4.3 Viewing Angle
U/D: 45 °/45°, L/R: 45°/45°

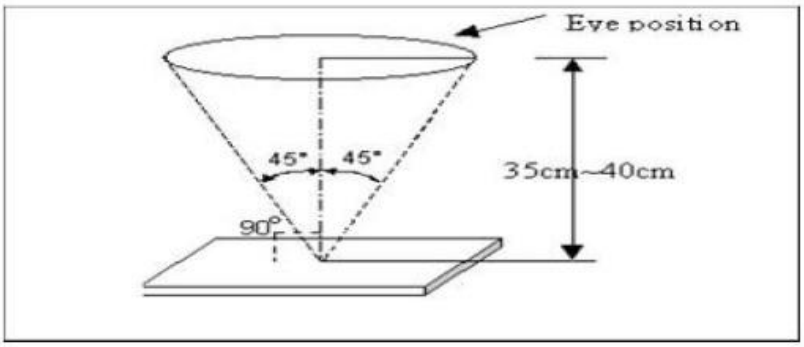



10.5 Inspection Criteria



Defects are classified as major defects and minor defects according to the degree of defectiveness defined here in.


10.5.1. Major defect

Item No	Items to be inspected	Inspection Standard
5.1.1	All functional defects	1) No display 2) Display abnormally 3) Short circuit 4) line defect
5.1.2	Missing	Missing function component
5.1.3	Crack	Glass Crack

10.5.2. Minor defect
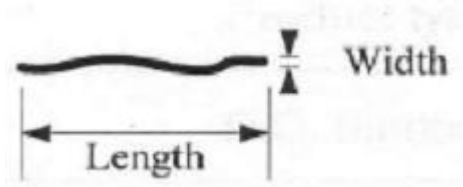
<table>
<tr><th>Item No</th><th>Items to be inspected</th><th colspan="2">Inspection standard</th></tr>
<tr><td rowspan="5">5.2.1</td><td rowspan="5">Spot Defect
Including Black spot White spot
Pinhole
Foreign particle
Polanizer dirt</td><td colspan="2">For dark/white spot is defined
φ = (x+y) ／2
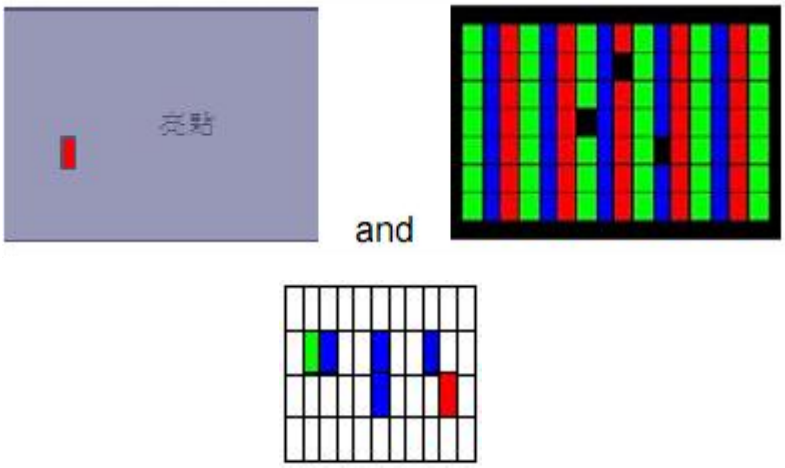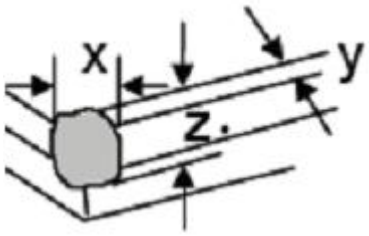
</td></tr>
<tr><td>Size φ(mm)</td><td>Acceptable Quantity</td></tr>
<tr><td>φ≤0.2</td><td>Ignore</td></tr>
<tr><td>0.2 ＜φ≤0.3</td><td>3</td></tr>
<tr><td>0.3 <φ</td><td>Not allowed</td></tr>
<tr><td rowspan="3">5.2.2</td><td rowspan="3">Line Defect
Including Black line White line
Scratch</td><td colspan="2">Define:
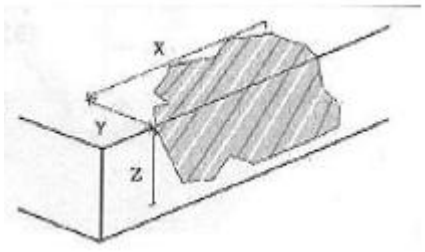
</td></tr>
<tr><td>Width(mm)
Length(mm)</td><td>Acceptable Quantity</td></tr>
<tr><td>W≤0.05</td><td>Ignore</td></tr>
</table>

		0.05 < W≤0.1 L≤2.5	3
		0.1 < W,or L>2.5	Not allowed
5.2.3	Polarizer Dent/Bubble	Sizeφ(mm)	Acceptable Quantity
		φ≤0.2	Ignore
		0.2 < φ≤0.3	2
		0.5 <φ	Not allowed
		Total QTY	3
5.2.4	Electrical Dot Defect	Bright and Black dot define:  Two Adjacent Dot	
		Inspection pattern: Full white,Full black,Red,green and blue screens	
		Item	Acceptable Quantity
		Black dot defect	2
		Bright dot defect	1
		Two Adjacent Dot	1
		There or more Adjacent Dot	Not allowed
		Total Dot	2
5.2.5	Glass defect	1.Corner Fragment:  	
		Size(mm)	Acceptable Quantity
		X≤3mm Y≤1mm Z≤T	Ignore T:Glass thickness X: Length

			Y: Width Z: thickness
		2. Side Fragment: 	
		Size(mm)	Acceptable Quantity
		X≤5.0mm Y≤1mm Z≤T	T:Glass thickness X: Length Y: Width Z: thickness

Note: 1). Dot defect is defined as the defective area of the dot area is larger than 50% of the dot area.
2). The distance between two bright dot defects (red, green, blue, and white) should be larger than 15mm.
3). The distance between black dot defects or black and bright dot defects should be more than 5mm apart.
4). Polarizer bubble is defined as the bubble appears on active display area. The defect of polarizer bubble shall be ignored if the polarizer bubble appears on the outside of active display area.
5).The edge bubble of polarizing film is less than 1/2 of the LCD black border .

10.6 Mechanics specification

As for the outside dimension, weight of the modules, please refer to product specification for more details.

11. Precautions for Use of LCD modules

11.1 Handling Precautions

11.1.1. The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.

11.1.2. If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.

11.1.3. Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.

11.1.4. The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.

11.1.5. If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If still not completely clear, moisten cloth with one of the following solvents:

- Isopropyl alcohol
- Ethyl alcohol

Solvents other than those mentioned above may damage the polarizer. Especially, do not use the following:

- Water
- Ketene
- Aromatic solvents

11.1.6. Do not attempt to disassemble the LCD Module.

11.1.7. If the logic circuit power is off, do not apply the input signals.

11.1.8. To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.

11.1.8.1. Be sure to ground the body when handling the LCD Modules.

11.1.8.2. Tools required for assembly, such as soldering irons, must be properly ground.

11.1.8.3. To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.

11.1.8.4. The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.

11.2 Storage Precautions

11.2.1.When storing the LCD modules,avoid exposure to direct sunlight or to the light of fluorescent lamps.

11.2.2.The LCD modules should be stored under the storage temperature range if the LCD modules will be stored for a long time,the recommend condition is :

Temperature : 0℃ ~40℃ Relatively humidity: ≤80%

11.2.3.The LCD modules should be stored in the room without acid, alkali and harmful gas.

11.3 Transportation Precautions

The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.